


CYLINDRICAL STUD MOUNTS: DOUBLE STUD (MALE/MALE) SERIES


Performance Characteristics

A22-142 Load vs Deflection

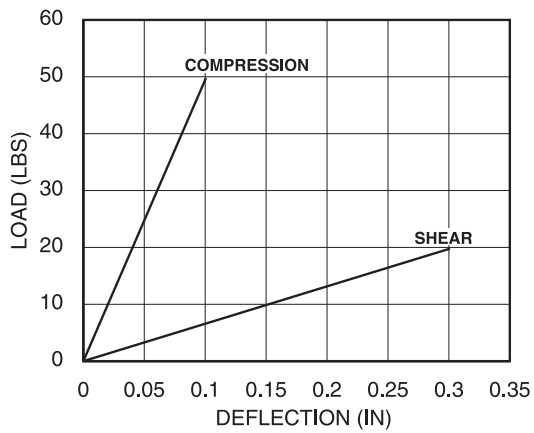

Static Load (lbs.)	Natural Frequency (Hertz)
IN SHEAR	
14.0	7.0
10.0	9.0
6.0	14.0
2.0	22.0
IN COMPRESSION	
50.0	10.0
40.0	11.0
30.0	12.5
20.0	15.5
10.0	21.0

A22-131 Load vs Deflection

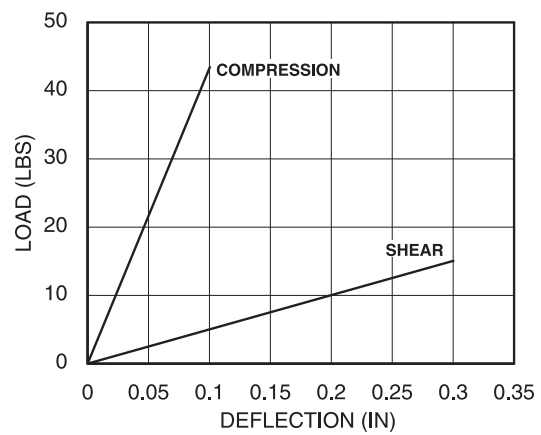


Static Load (lbs.)	Natural Frequency (Hertz)
IN SHEAR	
11.5	7.5
7.2	8.0
6.0	10.0
4.5	12.0
3.3	13.0
2.0	17.0
1.5	20.0
IN COMPRESSION	
44.0	10.0
31.5	12.0
23.0	13.0
14.5	17.0
10.0	20.0

CYLINDRICAL STUD MOUNTS: DOUBLE STUD (MALE/MALE) SERIES


Performance Characteristics

A22-141 Load vs Deflection

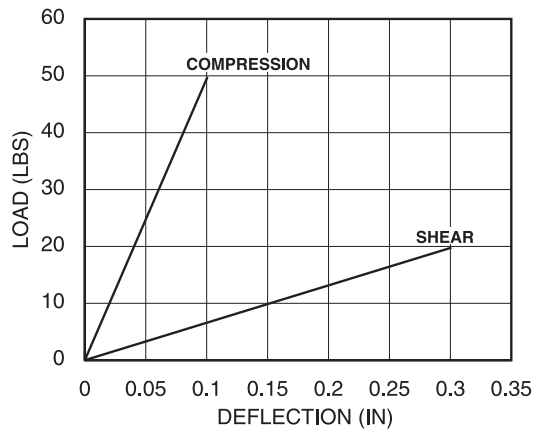

Static Load (lbs.)	Natural Frequency (Hertz)
IN SHEAR	
14.5	7.5
11.5	8.0
8.0	10.0
5.7	12.0
4.5	13.0
3.0	17.0
2.0	20.0
IN COMPRESSION	
50.0	10.0
35.5	12.0
25.5	13.0
16.5	17.0
12.5	20.0

A34-141 Load vs Deflection

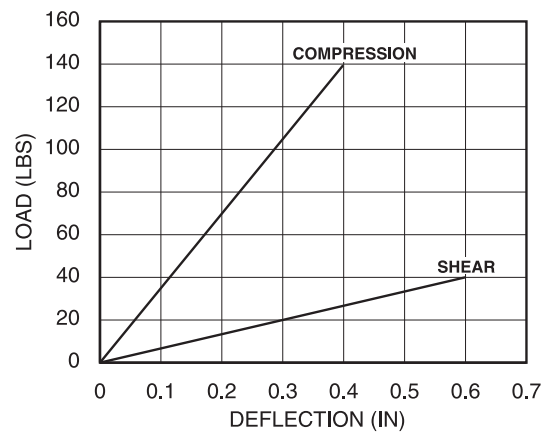

Static Load (lbs.)	Natural Frequency (Hertz)
IN SHEAR	
13.5	7.5
10.0	8.0
8.0	10.0
6.0	12.0
4.0	13.0
3.0	17.0
2.0	20.0
IN COMPRESSION	
76.0	8.0
42.0	10.0
31.0	12.0
23.0	13.0
15.0	17.0
10.0	20.0