


CABLEMOUNT MOUNT SERIES: CM05006

Dimensions & Load Ratings

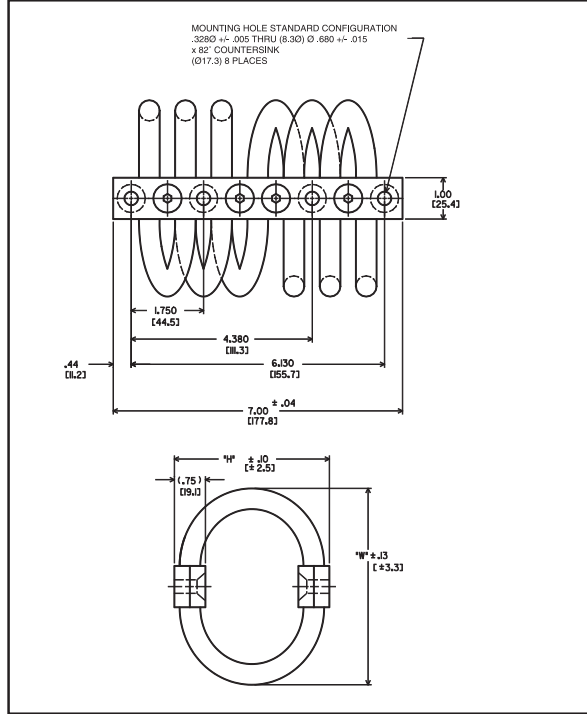

SUFFIX	MOUNTING HOLE CONFIGURATION
NONE	Standard Configuration as shown in drawing
- A	1/4 -28 Threaded inserts in both retaining bars
- B	1/4 -28 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar
- C	M 6 x 1.0 Threaded inserts in both retaining bars
- D	M 6 x 1.0 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar w/90° countersink
- E	Standard configuration as shown in drawing w/90° countersink

PART #	DIMENSIONS		COMPRESSION		SHEAR		ROLL		45° COMP/ROLL	
	H	W	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection
CM05006-1	3.25	4.00	469	1.0	143	1.0	158	1.0	300	1.5
CM05006-2	3.50	4.13	356	1.1	113	1.1	120	1.1	225	2.0
CM05006-3	3.75	4.75	206	1.3	53	1.5	83	1.5	180	2.3
CM05006-4	4.25	5.25	150	1.5	41	1.6	56	1.6	128	2.8
CM05006-5	4.90	5.65	90	1.8	38	1.7	30	1.7	98	3.5
CM05006-6	5.40	6.13	75	2.0	26	2.0	26	2.0	68	4.0
CM05006-7	6.10	7.10	45	2.2	21	2.2	24	2.2	41	4.5

Natural Frequency at rated load = approx. 10 Hertz