


CABLEMOUNT MOUNT SERIES: CM06258

Dimensions & Load Ratings

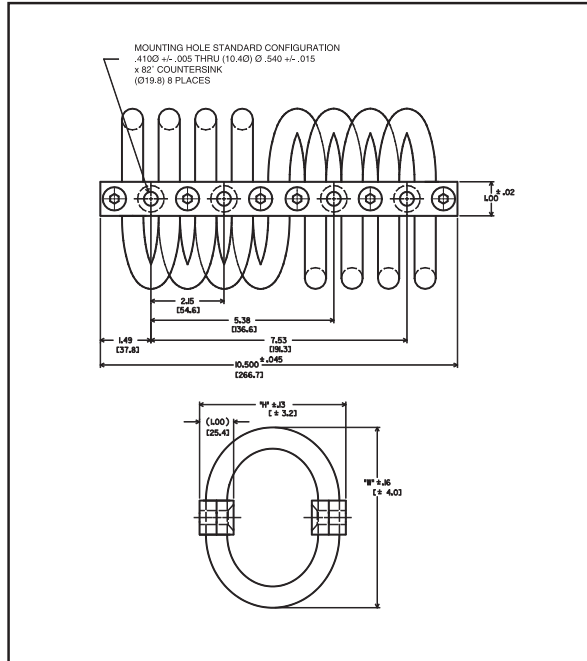

SUFFIX	MOUNTING HOLE CONFIGURATION
NONE	Standard Configuration as shown in drawing
- A	3/8 - 24 Threaded inserts in both retaining bars
- B	3/8 - 24 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar
- C	M 10 x 1.5 Threaded inserts in both retaining bars
- D	M 10 x 1.5 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar w/90° countersink
- E	Standard configuration as shown in drawing w/ 90° countersink

PART #	DIMENSIONS		COMPRESSION		SHEAR		ROLL		45° COMP/ROLL	
	H	W	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection
CM06258-1	3.50	4.00	1300	1.2	325	1.2	200	1.2	800	1.8
CM06258-2	3.90	4.40	800	1.4	250	1.4	190	1.4	450	2.3
CM06258-3	4.30	5.30	625	1.8	130	1.8	150	1.2	325	2.8
CM06258-4	4.70	6.00	440	2.2	110	2.2	145	2.2	275	3.2
CM06258-5	5.00	6.50	350	2.5	70	2.5	130	2.5	175	3.6

Natural Frequency at rated load = approx. 10 Hertz