


CABLEMOUNT MOUNT SERIES: CM08758

Dimensions & Load Ratings

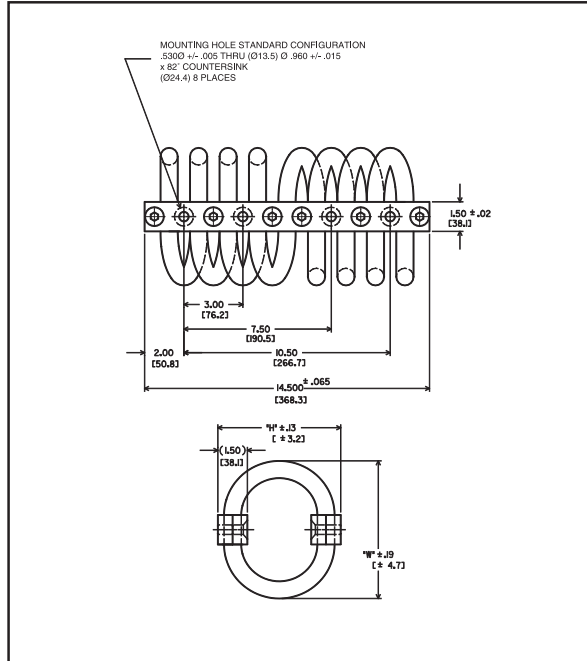

SUFFIX	MOUNTING HOLE CONFIGURATION
NONE	Standard Configuration as shown in drawing
- A	1/2 - 13 Threaded inserts in both retaining bars
- B	1/2 - 13 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar
- C	M 12 x 1.75 Threaded inserts in both retaining bars
- D	M 12 x 1.75 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar w/90° countersink
- E	Standard configuration as shown in drawing w/90° countersink

PART #	DIMENSIONS		COMPRESSION		SHEAR		ROLL		45° COMP/ROLL	
	H	W	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection
CM08758-1	5.25	5.50	1500	1.8	400	2.1	350	2.1	875	2.5
CM08758-2	6.00	6.50	1000	2.1	300	2.6	300	2.6	750	3.2
CM08758-3	6.25	7.00	900	2.3	225	2.9	238	2.9	600	3.8
CM08758-4	7.50	8.25	600	3.4	125	3.3	138	3.3	450	4.7
CM08758-5	8.50	9.25	400	4.2	100	4.0	125	4.0	250	6.4

Natural Frequency at rated load = approx. 10 Hertz