

44000 Tube Mount Series

We make it **possible**




DESCRIPTION & CHARACTERISTICS:

Rugged, low profile, high capacity mounts for vibration and shock protection. Recommended for use with off-road equipment, trucks, construction equipment and power generation equipment.

- » Uses the same installation hardware as the 22000 series mounts.
- » Available in a full range of load ratings and sizes.
- » Symmetrical design prevents installation error.
- » Axial-to-Radial stiffness 4:1.
- » Available in Neoprene or Natural Rubber for most environments.
- » Fail-safe when used with snubbing washer.

HUTCHINSON 44000 TUBE MOUNT ADVANTAGES:

- » Improved durability and service life.
- » Integrated metal flanges enable faster installation and provide lower cost because the mounting hole does not require deburring or chamfering.
- » Accommodates alternative support plate thicknesses by varying tube length.
(Contact Hutchinson Engineering for specifics on this feature)
- » Parts are color coded for ease of identification.
- » RoHS Compliant.

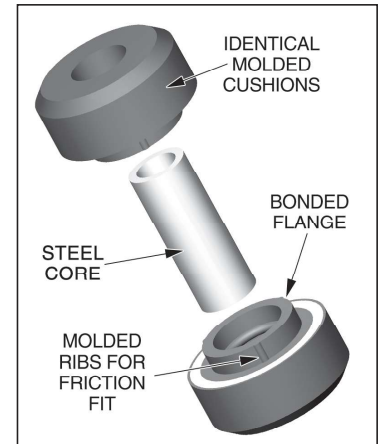

ENVIRONMENTAL DATA:

- » Neoprene elastomer has an operating temperature range of -20° F to +180° F (-30° C to + 82° C) and is resistant to oils, most solvents and ozone.
- » Natural rubber has an operating temperature range of -40° F to +180° F (-40° C to +82° C)

44000 SERIES DIMENSIONS:

SIZE	Ø A		Ø B		C		D		Ø E		Weight	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs. oz.	grams
44001	1.31	33.3	.730	18.5	0.50	12.7	1.25	31.8	.397	10.1	1.5 oz.	43
44002	1.88	47.8	1.23	31.2	0.78	19.8	1.94	49.3	.532	13.5	5.0 oz.	142
44003	2.55	64.8	1.48	37.6	0.90	22.9	2.43	61.7	.657	16.7	11.0 oz.	312
44004	3.50	89.0	2.23	56.6	1.00	25.4	2.88	73.2	.938	23.8	1 lb.8 oz.	667
44005	4.88	124.0	2.47	62.7	1.25	31.8	3.38	85.9	1.063	27.0	2 lb. 14 oz.	1,305



DIMENSIONAL DATA:

See reverse side for
Technical Specifications

